



T-1 LIGHTING

Project	Catalog #
Distributor	Type
Prepared by	Date



BASQUE RETRO CENTER BASKET SERIES

T1-EPBLEDRTFK

The **Basque Series** is a new generation of center baskets with revolutionary multi-watt and multi-CCT technology. The field adjustable multi-watt, multi-color dip switch on the driver allows you to change the wattage and color temperature according to your project's needs. This series comes in 2x2, and 2x4 packages. With a slimmer construction, the entire fixture functions as a heat sink to keep the LED chips cooler, thus prolonging the life of the light. V-hooks and J-adaptors are included.

SPECS

Model Number	Input Power	Color Temp	Input Voltage	Lumens	Efficacy	Temp	CRI	IP
T1-EPBLEDRTFK14/U/MW29-MCCT	Multi-watt 15/19/24/29W	MCCT	120-277V	2112	141	-40°C ~ +40°C -40°F ~ +104°F	>80	20
				2675				
				3379				
				4083				
T1-EPBLEDRTFK22/U/MW29-MCCT	Multi-watt 15/19/24/29W			2103	140			
				2664				
				3365				
				4066				
T1-EPBLEDRTFK24/U/MW39-MCCT	Multi-watt 24/29/32/39W			3247	136			
				3924				
				4330				
				5277				
T1-EPBLEDRTFK24/U/MW49-MCCT	Multi-watt 29/34/39/49W	3906	134					
		4580						
		5253						
		6600						

WARRANTY: SEVEN YEAR PARTS AND FIVE YEAR LABOR
*THIS PRODUCT LUMENS ARE MEASURED AT 3500K






T-1 LIGHTING

BASQUE RETRO CENTER BASKET SERIES T1-EPBLEDRTFK


ORDERING OPTIONS

SERIES	FORM FACTOR	WATTAGE		COLOR TEMP.		BACKUP		CONTROLS	
T1-EPBLED	14	MW29		MCCT		EM		MS	
	14 1'x4'			MCCT	3500K/ 4000K/ 5000K	[Blank] EM	None Emergency Battery Backup	[Blank] MS	None Motion Sensor
	22 2'x2'	MW29	15/19/24/29W						
	24 2'x4'	MW39 MW49	24/29/32/39W 29/34/39/49W						

T1-EPBLEDRTFK14/U/MW29-MCCT

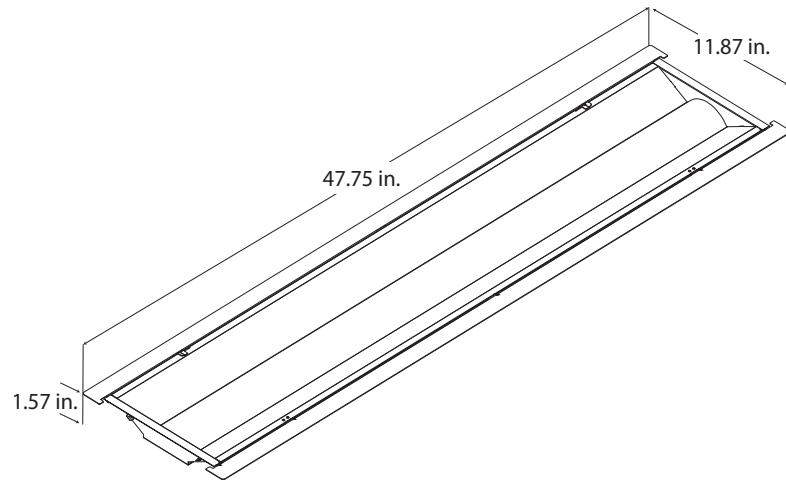


T1-EPBLEDRTFK22/U/MW29-MCCT

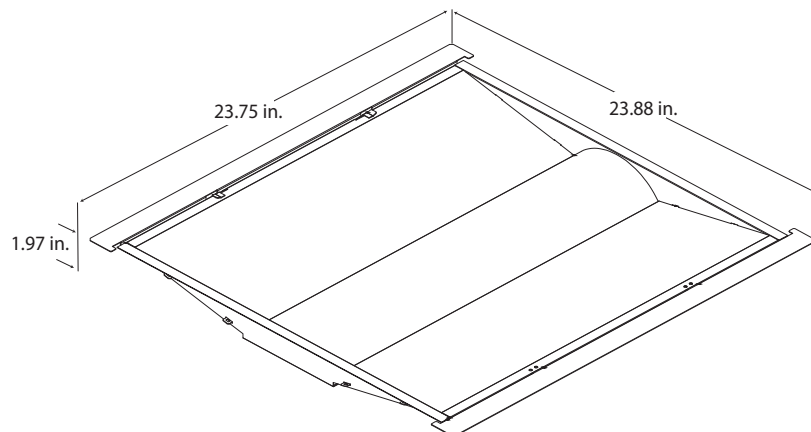


DIMENSIONS

DIMENSIONS

T1-EPBLEDRTFK24/U/MW39-MCCT
T1-EPBLEDRTFK24/U/MW49-MCCT

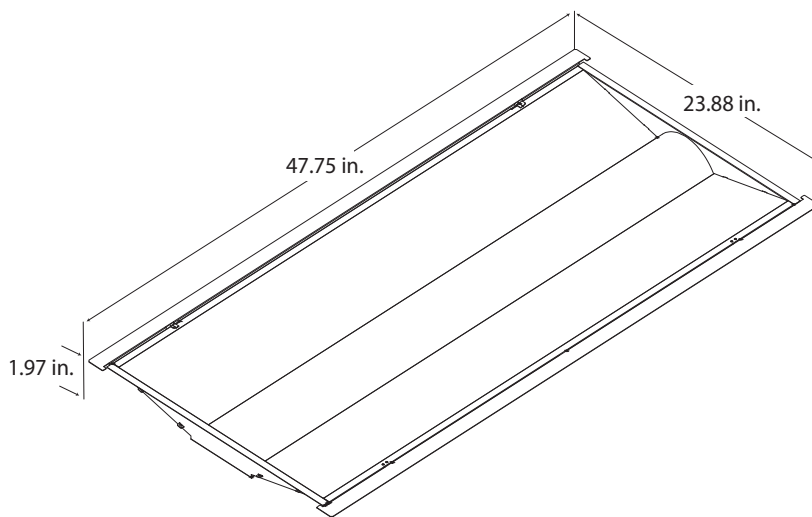

T1-EPBLEDRTFK14/U/MW29-MCCT

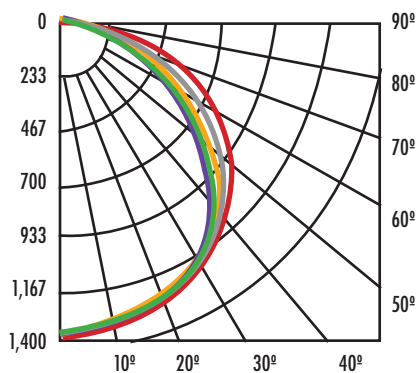


FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%)	98.6	4,037.8	165	158.1
Beam (50%)	73.3	3,000.7	127.3	106.7
Total	99.9	4,090.6		

■ 0°H
 ■ 22.5°H
 ■ 45°H
 ■ 67.5°H
 ■ 90°H

T1-EPBLEDRTFK22/U/MW29-MCCT

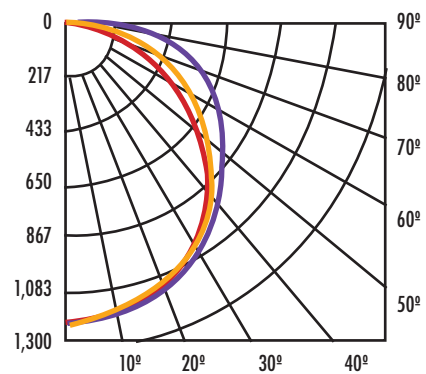

FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%)	98.7	3,953.5	159.8	171.6
Beam (50%)	70.8	2,835.1	109.4	121.6
Total	99.9	4,003.7		

■ 0°H
 ■ 45°H
 ■ 90°H


PHOTOMETRIC DATA



T-1 LIGHTING

BASQUE RETRO CENTER BASKET SERIES T1-EPBLEDRTFK

T1-EPBLEDRTFK24/U/MW39-MCCT

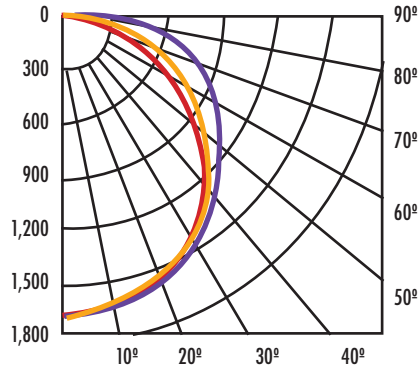


FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%)	98.7	5,251.1	160.2	172.5
Beam (50%)	70.5	3,752.1	109.1	122
Total	99.9	5,319.7		

0°H 45° H 90° H

T1-EPBLEDRTFK24/U/MW49-MCCT

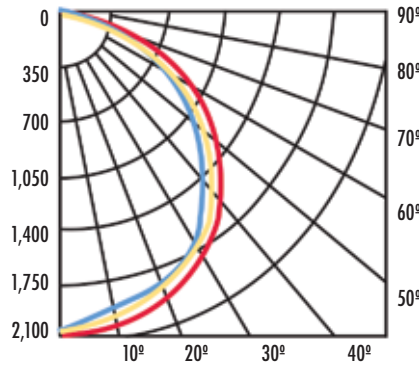

FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%)	98.6	4,037.8	165	158.1
Beam (50%)	73.3	3,000.7	127.3	106.7
Total	99.9	4,090.6		

0°H 90°H 45°H

PHOTOMETRIC DATA