



T-1 LIGHTING

Project	Catalog #
Distributor	Type
Prepared by	Date



BASQUE CENTER BASKET SERIES T1-EPBLED

The **Basque Series** is a new generation of center baskets with revolutionary multi-watt and multi-CCT technology. The field adjustable multi-watt, multi-color dip switch on the driver allows you to change the wattage and color temperature according to your project's needs. This series comes in 2x2, and 2x4 packages. With a slimmer construction, the entire fixture functions as a heat sink to keep the LED chips cooler, thus prolonging the life of the light. V-hooks and J-adaptors are included.

SPECS

Model Number	Input Power	Color Temp	Input Voltage	Lumens	Efficacy	Temp	CRI	IP
T1-EPBLED14/U/MW29-MCCT	Multi-watt 15/19/24/29W	MCCT	120-277V	2118	141	-40°C ~ +40°C -40°F ~ +104°F	>80	20
				2683				
				3389				
				4095				
T1-EPBLED22/U/MW29-MCCT	Multi-watt 15/19/24/29W			2109	140			
				2671				
				3374				
				4077				
T1-EPBLED24/U/MW39-MCCT	Multi-watt 24/29/32/39W			3262	136			
				3941				
				4349				
				5300				
T1-EPBLED24/U/MW49-MCCT	Multi-watt 29/34/39/49W			3880	134			
				4549				
				5218				
				6556				

WARRANTY: SEVEN YEAR PARTS AND FIVE YEAR LABOR

*THIS PRODUCT LUMENS ARE MEASURED AT 3500K






T-1 LIGHTING

BASQUE
 CENTER BASKET SERIES
 T1-EPBLED


ORDERING
 OPTIONS

SERIES	FORM FACTOR	WATTAGE	COLOR TEMP.	BACKUP	CONTROLS
T1-EPBLED	14	MW29	MCCT	EM	MS
	14 1'x4'			[Blank] None	[Blank] None
	22 2'x2'	MW29 15/19/24/29W	MCCT 3500K/4000K/5000K	EM Emergency Battery Backup	MS Motion Sensor
	24 2'x4'	MW39 24/29/32/39W			
		MW49 29/34/39/49W			

T1-EPBLED14/U/MW29-MCCT

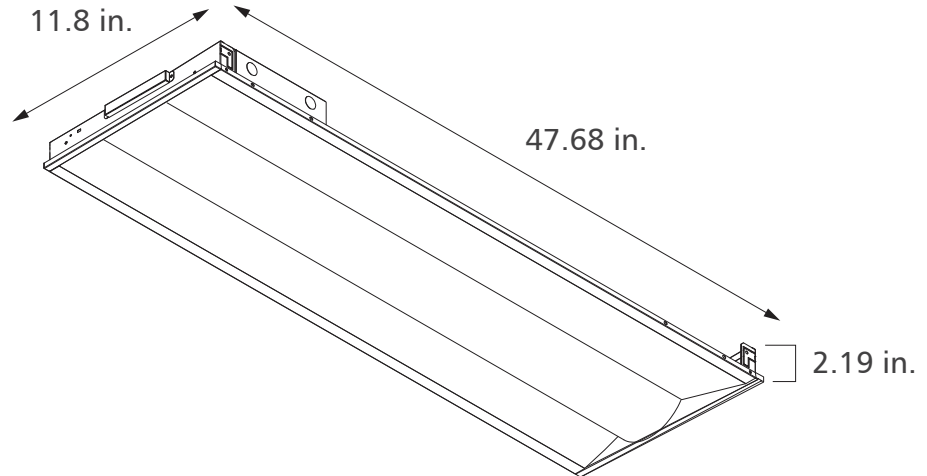

T1-EPBLED22/U/MW29-MCCT

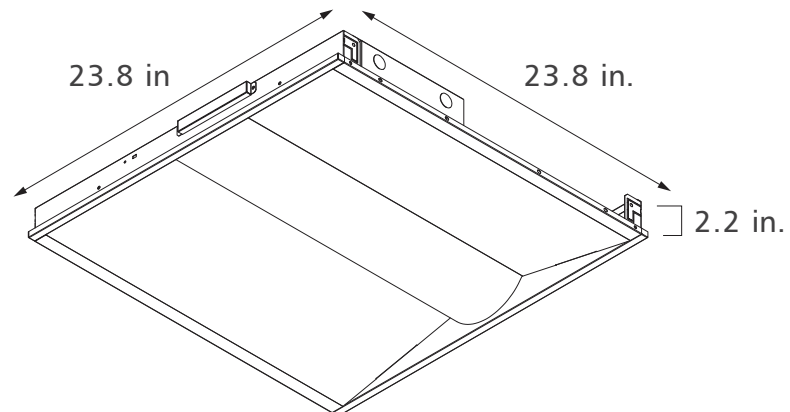

DIMENSIONS




T-1 LIGHTING



BASQUE
 CENTER BASKET SERIES
 T1-EPBLED

DIMENSIONS

T1-EPBLED24/U/MW39-MCCT
 T1-EPBLED24/U/MW49-MCCT

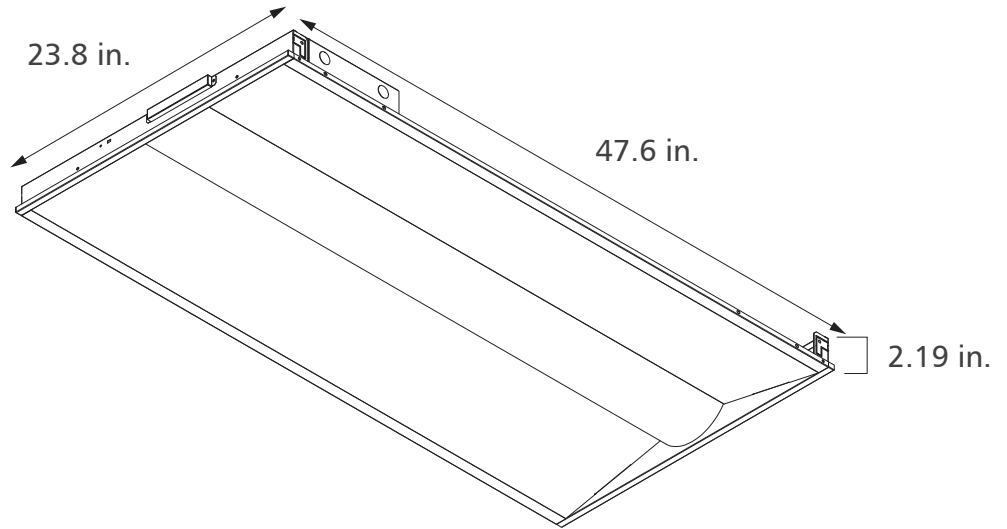

PHOTOMETRIC DATA MW29-MCCT

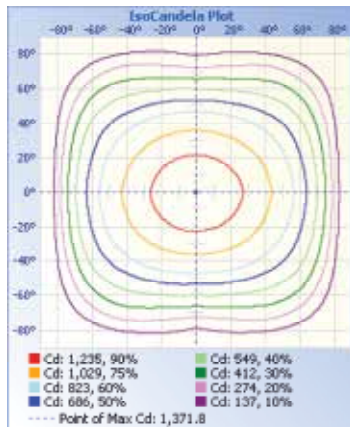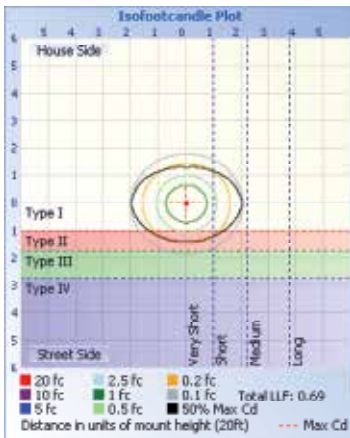


Center Beam Fc	Beam Width
4.75 fc	45.7 ft
1.19 fc	91.5 ft
0.53 fc	137.2 ft
0.30 fc	182.9 ft
0.19 fc	228.7 ft
0.13 fc	274.4 ft

Vert. Spread: 106.7°
 Horiz. Spread: 127.3°

PHOTOMETRIC DATA

T1-EPBLED22/U/MW29-MCCT



PHOTOMETRIC DATA MW29-MCCT

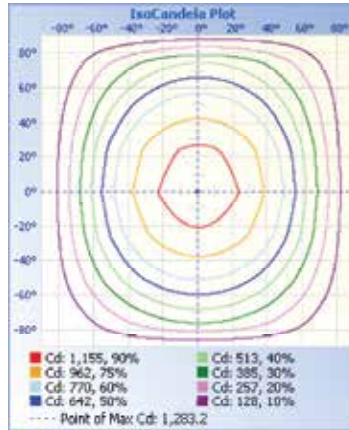

Center Beam fc	Beam Width	
17.0ft	4.44 ft	50.1 ft
34.0ft	1.11 ft	100.1 ft
51.0ft	0.49 ft	150.2 ft
68.0ft	0.28 ft	200.2 ft
85.0ft	0.18 ft	250.3 ft
102.0ft	0.12 ft	300.4 ft

Vert. Spread: 125.6°
 Horiz. Spread: 111.6°


PHOTOMETRIC DATA MW39-MCCT

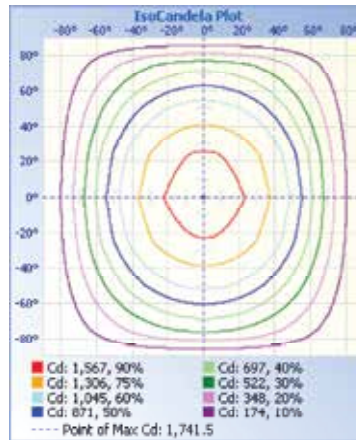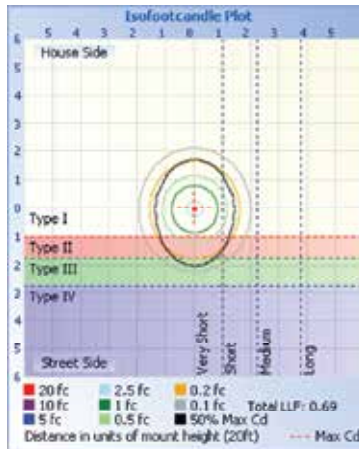

Center Beam fc	Beam Width	
17.0ft	6.03 ft	48.4 ft
34.0ft	1.51 ft	96.8 ft
51.0ft	0.67 ft	145.2 ft
68.0ft	0.38 ft	193.6 ft
85.0ft	0.24 ft	242.0 ft
102.0ft	0.17 ft	290.4 ft

Vert. Spread: 123.3°
 Horiz. Spread: 109.8°

PHOTOMETRIC DATA MW49-MCCT

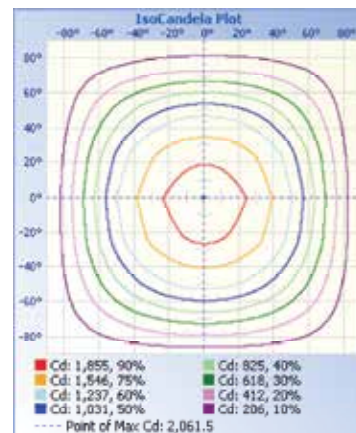

Center Beam fc	Beam Width	
17.0ft	7.13 ft	52.0 ft
34.0ft	1.78 ft	104.0 ft
51.0ft	0.79 ft	156.0 ft
68.0ft	0.45 ft	208.0 ft
85.0ft	0.29 ft	260.0 ft
102.0ft	0.20 ft	311.9 ft

Vert. Spread: 113.3°
 Horiz. Spread: 113.6°