

Project	Catalog #
Distributor	Type
Prepared by	Date



G2 **OHRB**
UFO High Bay Series
T1-G2RHBLEDF

The **Orhb Series** is our new generation LED high bays featuring a thinner and circular profile with an upgraded modern look to the traditional high bay. At the back of the fixture is a 4W uplight for added luminosity. Designed with easy installation of sensors at the face of the fixture. It is an ideal application for any high ceiling facility looking to improve its aesthetic while being energy-efficient. The Orhb Series has an IP65 protection grade that makes it suitable for wet locations and environments with ambient temperature of up to 122°F. This fixture comes equipped with closed hook for mounting and safety cable for stability.

SPECS

Model Number	Input Power	Color Temp	Input Voltage	Lumens	Efficacy	Beam Angle	Temp	CRI	IP
T1-G2RHBLEDF/U/100-40	100	40K	120-277V	15,100	151	120°	-40°C ~ +55°C -40°F ~ +131°F	80	65
T1-G2RHBLEDF/U/100-50		50K		15,200	152				
T1-G2RHBLEDF/U/150-40	150	40K		22,650	151				
T1-G2RHBLEDF/U/150-50		50K		22,800	152				
T1-G2RHBLEDF/U/200-40	200	40K		30,200	151				
T1-G2RHBLEDF/U/200-50		50K		30,400	152				
T1-G2RHBLEDF/U/250-40	250	40K		37,750	151				
T1-G2RHBLEDF/U/250-50		50K		38,000	152				




WARRANTY: SEVEN YEAR PARTS AND FIVE YEAR LABOR



Model Number	Wattage	Color Temp	Accessories	Controls
T1-G2RHBLEDF	/U/100	-40	-SM	-OS
	100 100W	40 4000W	[Blank] Hook/Loop	OS On/off PIR
	150 150W	50 5000W	SM Surface mount bracket	High bay motion sensor
	200 200W		RF Reflector	DL Daylight harvesting sensor
	250 250W			MS Bi-level microwave sensor

ORDERING OPTIONS

DIMENSIONS

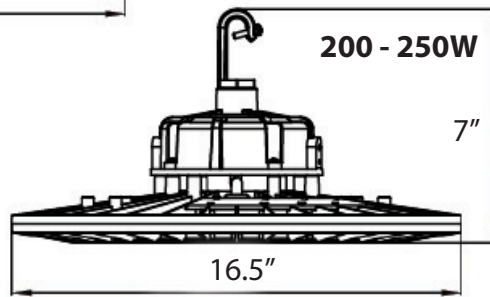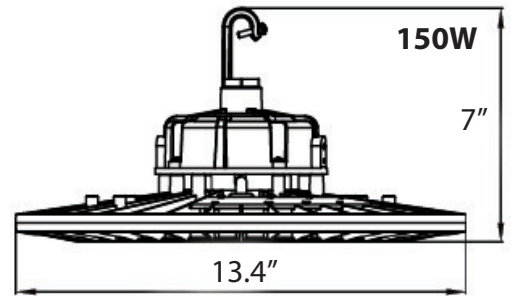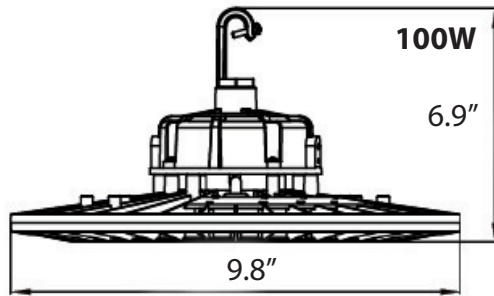

Aluminum Reflector



PC reflector with Bottom Cover



Adaptor (recommended for 250W UFO when connecting a reflector)




Dimmable Motion Sensor




Built-In Sensor Receptacle

ACCESSORIES


100W

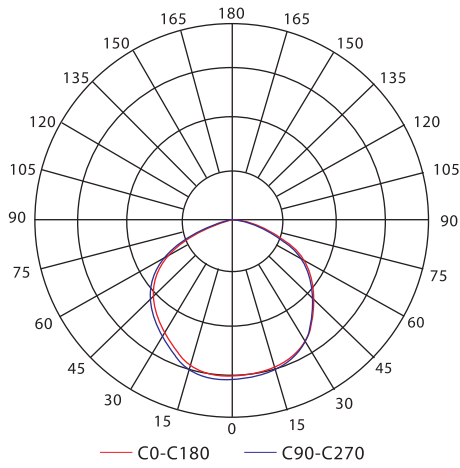

150W

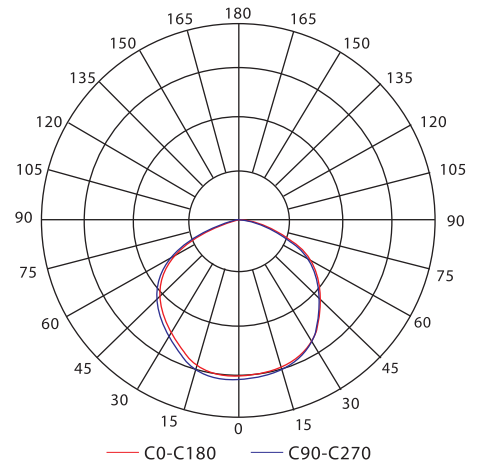

200/250W

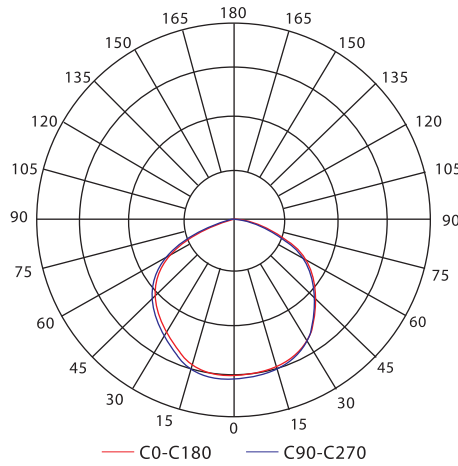

Up Light
 for single wattage & CCT
 models only.

Multi-Wattage # CCT
 have no Up Light.

